



# IPER-CUT

## TOP CUTTING AND POLISHING



### PRODUCT DESCRIPTION

Cutting polishing compound with innovative components, used to remove marks, failing, dullness and P1500-P3000 sand scratches, according to the hardness of treated paints. It may be used both on oxidized surfaces and new well dried paints. It is quick and easy to use and need of a very small quantity, without waste of time and product. It is also used as 'One Step', since it leaves an extremely deep gloss level.

### PHYSICAL PROPERTIES

**Colour:** White  
**Physical form:** Creamy  
**Odour:** Light and pleasant  
**Density :** 1,030 g/ml  
**Flammability:** Not flammable  
**Type of surface:** Car bodywork



### HOW TO USE

Please apply a small quantity of compound on a medium-hard orange foam pad. Let the polisher turn at low revolutions, speeding them up (800-1500 RPM) while spreading the paste with crossed movements. Pay attention at not overheating the paint. Do not overstay on the surface without adding more product. If necessary, please repeat the application more times till the complete removal of scratches. Eventually, wipe the surface with a Silky Microfiber towel.

### PRODUCT INFORMATION

Packaging	Code	Pcs/Box
0,5 kg	600210	20
1 kg	600221	12
5 kg	600198	2
Packaging	Black Code	Pcs/Box
0,5 kg	600209	20
1 kg	600222	12
5 kg	600199	2

INSTRUCTIONS FOR USE



CROSSED MOVEMENTS

RECOMMENDATIONS




SHAKE BEFORE USE



APPLY SMALL QUANTITY




AS AN ALTERNATIVE TO FOAM



STORAGE

FOLLOWING STEPS

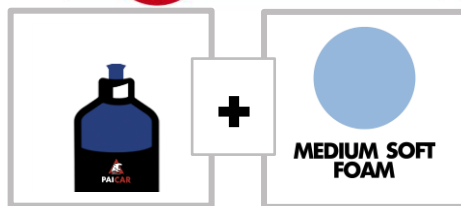

SUPERFINISHER 2



SIRIUS

